



# 15PRO



IMR

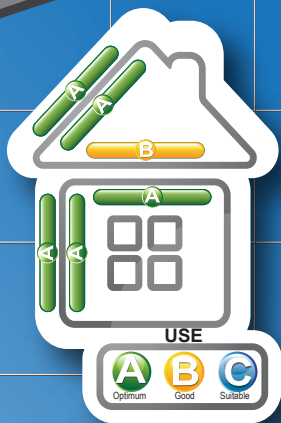


## TECHNICAL CHARACTERISTICS

Dimensions	9,81 x 1,53m
Surface	15 m <sup>2</sup>
Weight (roll)	+/- 8,9 kg
Thermal conductivity (λ)	0,030 W/(m.K)
Weight (to the m <sup>2</sup> )	+/- 590 g/m <sup>2</sup>
Thickness	+/- 25 mm
Resistance to water penetration	W1

## COMPOSITION

- Composed of 15 layers
- > 2 metalised reinforced polyester films
- > 2 polyester waddings
- > 5 polyethylene foams 0,8 mm
- > 6 metalised polyester films

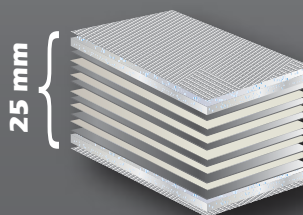

## USE

Must not be laid near a source of direct heat or flame, for example chimney, a fireplace, around a bushel, boiler hot pipes etc... For such applications you should use insulation classified as fireproof.

## QUICK AND EASY INSTALLATION



MEASURE



CUT



STAPLE



TAPE

Compatible tape



100 x 25



Non toxic



Ultrasonic welding



Polyester flame retardant



Sealed air and water



Does not attract rodents



Made in France



www.xlmat.com

# REFLECTIVE INSULATION



3 760088 084817

697, Route des Chênes - 73200 GILLY-SUR-ISÈRE - FRANCE - Tél.: (+33)4 79 37 54 40 - e.mail : contact@xlmat.fr