




BUBBLES  
INSULATION

# DUOREFLEX

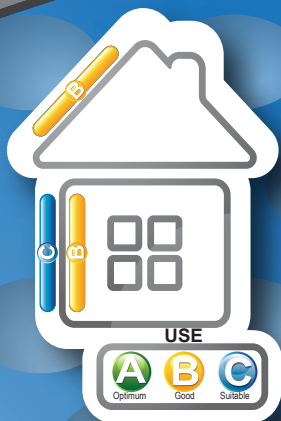

## TECHNICAL CHARACTERISTICS

Dimensions	12,5 x 1,2 m
Surface	15 m <sup>2</sup>
Weight (roll)	+/- 5,1 kg
Thermal conductivity (λ)	0,037 W/(m.K)
Weight (to the m <sup>2</sup> )	+/- 341 g/m <sup>2</sup>
Thickness	+/- 6 mm
Resistance to water penetration	W1



Non toxic




Sealed  
air and water



Does not attract  
rodents

## COMPOSITION

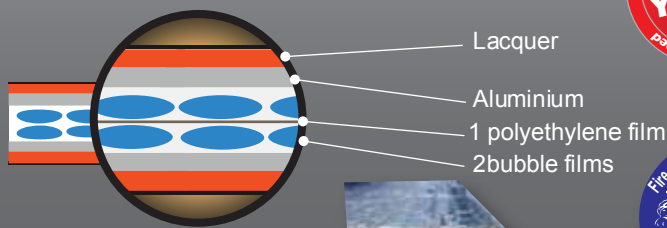

## USE

Must not be laid near a source of direct heat or flame, for example chimney, a fireplace, around a bushel, boiler hot pipes etc... For such applications you should use insulation classified fireproof.

## QUICK AND EASY INSTALLATION



MEASURE



CUT



STAPLE



TAPE

Compatible  
tape



ADHER'ALU  
(M1)



Made in  
France

rouleau de  
**15 m<sup>2</sup>**



www.xlmat.com

# REFLECTIVE INSULATION



3 760088 084015

697, Route des Chênes - 73200 GILLY-SUR-ISÈRE - FRANCE - Tél.: (+33)4 79 37 54 40 - e.mail : contact@xlmat.fr