



BUBBLES
INSULATION

PIPES' INSULATION




TECHNICAL CHARACTERISTICS

Dimensions	25 m x 12 cm
Surface	3 m ²
Weight (roll)	+/- 1,0 kg
Thermal conductivity (λ)	0,037 W/(m.K)
Weight (to the m ²)	+/- 341 g/m ²
Thickness	+/- 6 mm
Resistance to water penetration	W1



Non toxic

COMPOSITION

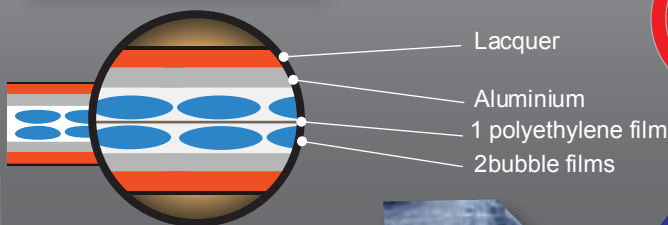

USE

Must not be laid near a source of direct heat or flame, for example chimney, a fireplace, around a bushel, boiler hot pipes etc... For such applications you should use insulation classified fireproof.



Sealed
air and water



Does not attract
rodents

Common usage:
- Heating pipes
- Sanitary pipes
(copper, PVC, cast iron)



QUICK AND EASY INSTALLATION



MEASURE



CUT



STAPLE



TAPE

Compatible
tape



ADHER'ALU
(M1)



Made in
France

roll of
3 m²



www.xlmat.com

REFLECTIVE INSULATION



3 760088 082103

697, Route des Chênes - 73200 GILLY-SUR-ISÈRE - FRANCE - Tél.: 04 79 37 54 40 - e.mail : contact@xlmat.fr