


IMR

MAX FEU A1 (M0)



FIREPROOF

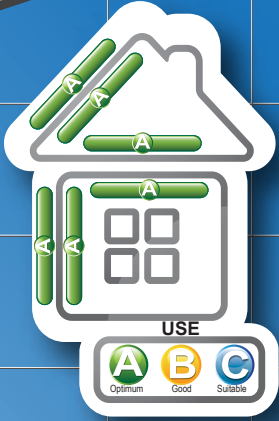

Sealed
air and water



Does not attract
rodents


TECHNICAL CHARACTERISTICS

| | |
|---------------------------------|--------------------------------|
| Dimensions | 8,35 x 1,2 m |
| Surface | 10 m ² |
| Weight (roll) | 13,4 kg (+/-10%) |
| Weight (to the m ²) | 1340 g/m ² (+/-10%) |
| Thickness | 15 mm (+/- 2) |

Technical
assessment
CSTB
N° : RA07-0047
A1 (M0)

COMPOSITION

- Composed of 5 layers
- 2 reinforced aluminium films
 - 3 fibreclass stripped mufflers

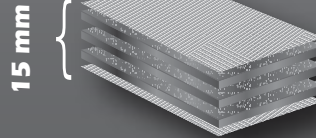

These rolls must be sheltered from rain and sun.

To guarantee optimum results, use our aluminium fireproof sticky tape.

Precaution
for use



QUICK AND EASY INSTALLATION



MEASURE



CUT



STAPLE



TAPE

Compatible
tape



ADHER'ALU
(M1)



Made in
France



www.xlmat.com

REFLECTIVE INSULATION



3 760088 084541

697, Route des Chênes - 73200 GILLY-SUR-ISÈRE - FRANCE - Tél.: (+33)4 79 37 54 40 - e.mail : contact@xlmat.fr