


IMR

XL'PREMIUM

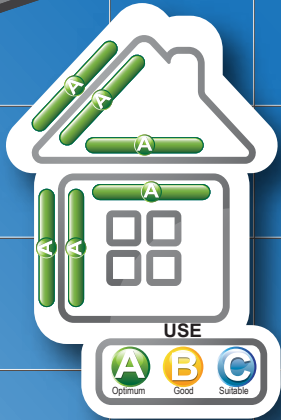


TECHNICAL CHARACTERISTICS

Dimensions	6,6 x 1,53 m
Surface	10 m ²
Weight (roll)	9,4 kg (+/-10%)
Weight (to the m ²)	944 g/m ² (+/-10%)
Thickness	70 mm (+/- 5)
Thermal resistance of the wall (*)	> 3 m ² K/W
Resistance to water penetration	W1
Permeability to water vapour	361 m



COMPOSITION

- Composed of 17 layers
- > 2 metalized reinforced polyester films
- > 8 polyester waddings
- > 7 metalized polyester films

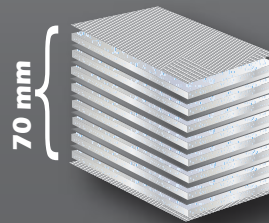

USE

Must not be laid near a source of direct heat or flame, for example chimney, a fireplace, around a bushel, boiler hot pipes etc... For such applications you should use insulation classified as fireproof.

QUICK AND EASY INSTALLATION



MEASURE



CUT



STAPLE



TAPE

Compatible tape



100 x 25



Non toxic



Ultrasonic welding



Polyester flame retardant



Sealed air and water



Does not attract rodents



www.xlmat.com

REFLECTIVE INSULATION



3 760088 000121

697, Route des Chênes - 73200 GILLY-SUR-ISÈRE - FRANCE - Tél.: (+33)4 79 37 54 40 - e.mail : contact@xlmat.fr